

BURR CUTTER Model BC-005



For deburring machined holes

- While gripping the lever, push the countersink into the machined holes to remove burrs.
- Optimum speed can be obtained by the adjust valve, resulting in clean deburred surfaces.
- Deburring work can be made wherever air source is available. No need to carry workpieces to a drill press.

- Straight profile makes it easy to position the body vertically in the machined holes.
- Push-to-engage type prevents the countersink from coming off the hole and damaging the workpiece.
- Compact, lightweight and knurled body enhances productivity in deburring work.

Countersinks are readily available in the market.

Pneumatic Deburring Tool **BURR CUTTER**

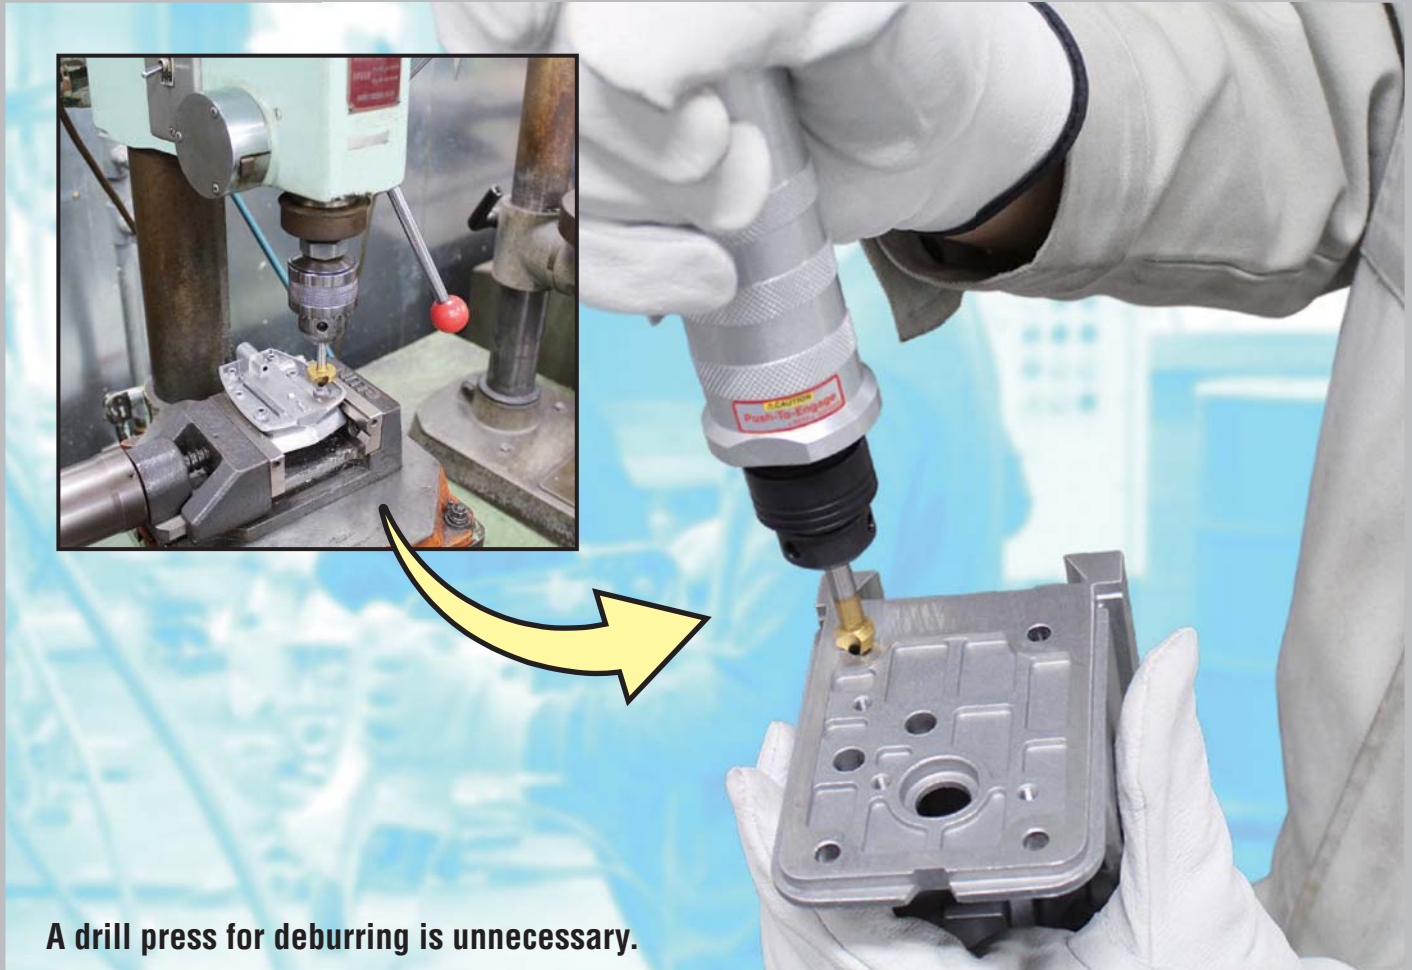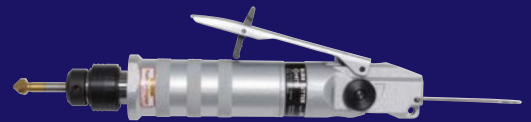


A drill press for deburring is unnecessary.

Specifications

Air Pressure	0.6 MPa (6 kgf/cm ²)
Air Consumption (No load)	0.22 m ³ /min
Motor Free Speed	420 min ⁻¹
Deburring Hole Diameter	3 to 34 mm
Countersink Shank Size	6, 8, 10 mm
Mass (Weight)	0.75 kg
Standard Accessories	• Chuck 6 mm • Chuck 8 mm • Chuck 10 mm (on the body) • Suspension Bail • Hex. Socket screw Key 2.5 mm • Bushing R 1/8 × NPT 1/4

Countersinks are not provided with the tool.
Please purchase them locally.

External Dimensions

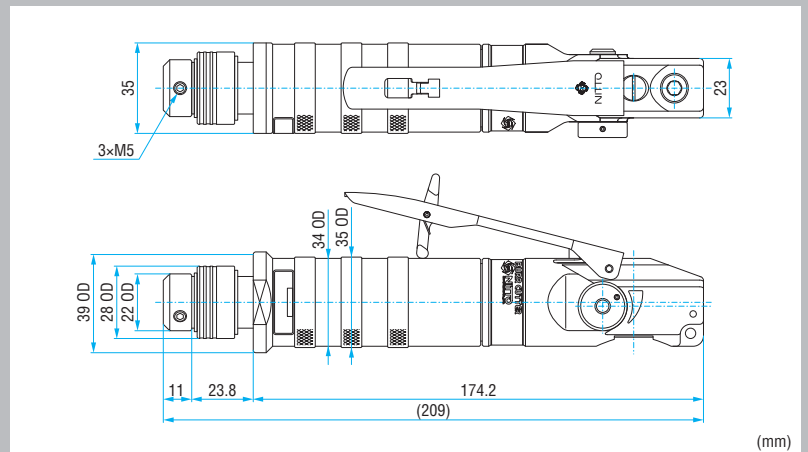

NITTO KOHKI CO., LTD.

Web www.nitto-kohki.co.jp/e

Head Office

9-4, Nakaikegami 2-chome, Ohta-ku, Tokyo 146-8555 Japan
Tel : +81-3-3755-1111 Fax : +81-3-3753-8791
E-mail : overseas@nitto-kohki.co.jp

DISTRIBUTED BY

This catalog is printed using environmentally friendly paper and vegetable oil inks.

